

PRO-WIRED




EXHAUST EXTRACTION *HOSE REEL*

Guarantee for **clean air**

Has the right solution for type of exhaust system.




- Sturdy construction with the thick steel.
- Japan made spring for a long life.
- High temperature, vibration, chemical -tolerant, light weight hose.
- Fixed on the ceiling or on the wall in compact.
- Convenient automatic winding of the hose.

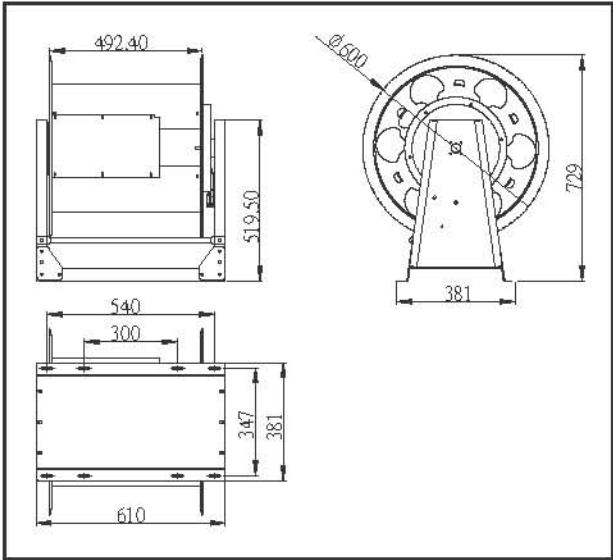

MODEL	Dimensions (mm)	Hose ID X Length	Temperature Range	Net weight / Gross weight
YZ600	630 x 600 x 730	ψ 4" x 6.5M	-40℃~170℃	39.0 / 43.0
		ψ 4" x 7.5M		39.8 / 43.8



- Sturdy construction with the thick steel.
- High temperature, vibration, chemical -tolerant, light weight hose.
- Fixed on the ceiling or on the wall in compact.
- Convenient automatic winding of the hose.

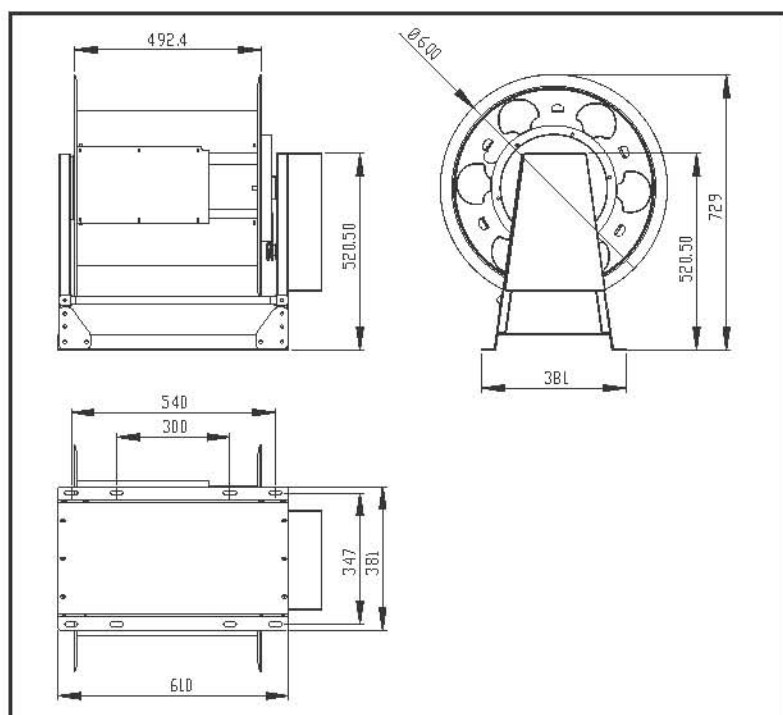

MODEL	Dimensions (mm)	Hose ID X Length	Temperature Range	Net weight / Gross weight
YZ600E	630 x 600 x 730	ψ4" x 6.5M	-40°C~170°C	39.0 / 43.0
		ψ4" x 7.5M		39.8 / 43.8

排煙器軟管配件



名稱：德國製抽風軟管
材質：鐵製品/不銹鋼
規格口徑：4"



名稱：阻擋球
材質：橡膠



名稱：雙管用連結管
材質：鐵製品/不銹鋼
規格口徑：4"

排煙器吸嘴



名稱：單口橡膠吸嘴
材質：耐高溫橡膠
規格： $\phi 120 \times 260$



名稱：雙口橡膠吸嘴
材質：耐高溫橡膠
規格： $\phi 90 \times 200 \times 230$



名稱：大型單口吸嘴
材質：鐵製品/不銹鋼
規格： $\phi 220 \times 422.5$

● 提供客戶依不同車款
訂製專用吸嘴

管配件



名稱：螺旋圓管
材質：鐵製品/不銹鋼
規格口徑：6" X 3M
8" X 3M



名稱：圓形三通正T管
材質：鐵製品/不銹鋼
規格口徑：6" / 8"



名稱：90 接頭
材質：鐵製品/不銹鋼
規格口徑：6" / 8"



名稱：十字型轉接頭
材質：鐵製品/不銹鋼
規格口徑：6" / 8"



名稱：吊架法蘭
材質：鐵製品
規格：6" / 8"



名稱：圓型變徑管
材質：鐵製品/不銹鋼
規格口徑：4" ~ 8"
4" ~ 6"



名稱：H鋼固定吊架
材質：鐵製品

馬達鼓風機




相數	頻率	輸出功率	輸入電壓	滿載電流	最大靜壓	最大風量	出口口徑
1 ϕ / 3 ϕ	50/60Hz	0.75kw	220V	7.5/3A	190/270mm H ₂ O	16/18m /min	4"
3 ϕ	50/60Hz	1.50kw	220V	5.4A	210/320mm H ₂ O	18/22m /min	4"
3 ϕ	50/60Hz	0.75kw	220V	8.0A	280/380mm H ₂ O	35/40m /min	5"
噪音	重量						
64/80db	21kgs						
74/90db	29kgs						
76/95db	36kgs						

現場專業安裝照片




安裝方式

A. 吸頂式安裝方式

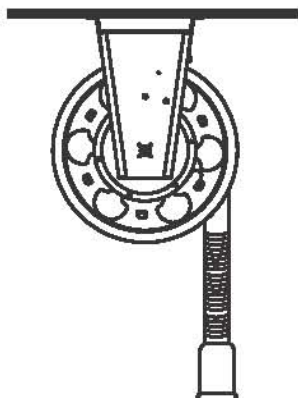

B. 牆壁固定安裝方式

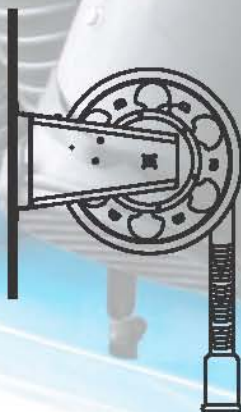

C. 牆壁支撐架安裝方式



● 專人現場實地勘查規劃安裝，提供各式場合最佳的安裝方案